



CE IP54



**Total Reliability - Advanced Diagnostics, Unrivaed
Output Pressure, Wide Temp Capability.**



Pulsarlube **M**

Features & Advantages

Cost Savings

Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)

Remote Installation

High output pressure (30bar) enables remote installation up to 10m (33ft)

Multi-Point Installation

Up to 8 lube points using Ø6 tube, Max. 6m (20ft) per point

Simple Operation

Easy to program with built-in LCD and simple button controls

Convenient Maintenance

Transparent container for easy visual inspection of remaining lubricant

Other Features


- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Auto Lock Out mode to prevent unintentional mode changes
- ▶ Easy to install in hazardous & confined areas

Typical Industries and Applications



- Automotive plants, iron/steel mills and nuclear power plants
- Cleanrooms & LM Guides where precise, multi-point lubrication is needed
- HVAC equipment & cooling towers where long lube lines may be necessary
- Motors and pumps in city water & wastewater treatment facilities
- Any places with extreme (low or high) temperature

Overview

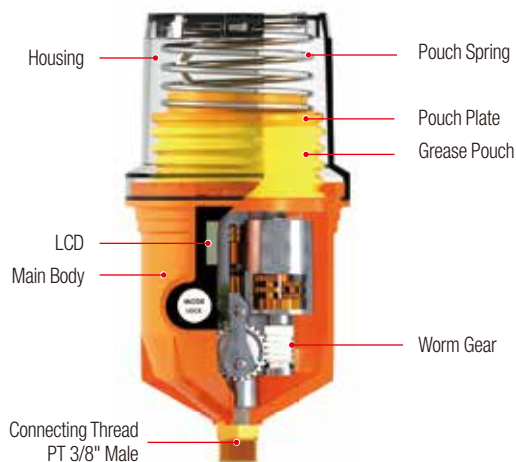

Product Specifications

Grease Pouch Capacity

60ml / 500ml (pre-set)
125ml / 250ml
(capacity setting available)

Power Supply

DC 4.5V Battery Pack (replaceable)
Standard : Alkaline Battery
Optional : Lithium Battery

Operating Pressure

30 ~ 60bar (435 ~ 870psi)

Operating Temperature

Standard Alkaline Battery :
-15°C ~ 60°C (5°F ~ 140°F)
Optional Lithium Battery :
-40°C ~ 60°C (-40°F ~ 140°F)

Dispensing Periods

60ml : 1 ~ 12 month
125ml / 250ml : 1, 2, 3, 6, 12 month & H (15 days)
500ml : 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

Single Point Remote Installation

Max. 10m (33ft) with Ø6 tube

Multi-Point Installation

Max. 6m (20ft) with Ø6 tube
(Up to 8 lube points)

Dispensing Volume Size

0.34ml/stroke (@20°C/68°F)

Product Certifications & IP Code

CE / IP54

