

Manually or pneumatically actuated piston pumps

# Product series Pxx

For oil and fluid grease

For use in SKF MonoFlex single-line centralized lubrication systems



Manually or pneumatically actuated piston pumps with pressure relief valve are employed in SKF MonoFlex single-line systems.



**Important information on product usage**

SKF and Lincoln lubrication systems or their components are not approved for use with gases, liquefied gases, pressurized gases in solution and fluids with a vapor pressure exceeding normal atmospheric pressure (1 013 mbar) by more than 0,5 bar at their maximum permissible temperature.



CAD models for products shown in this brochure can be downloaded at:  
**[skf-lubrication.partcommunity.com](http://skf-lubrication.partcommunity.com)**

# General Information

SKF MonoFlex piston pumps have a limited displacement per stroke, which limits the metered quantity and expansion of a system.

These pumps are equipped with a relief device necessary for operation of the piston distributors.

When the pump piston returns to the normal position, the main line is also relieved via the pressure relief valve.

The connected load of the system must be considered when planning the system.

To ensure the reserves required for pressure build-up, the displacement of the piston pump should be at least 1.5 times the connected load.

When planning fluid grease systems, the compressibility of the grease (approx. 1%) must also be taken into consideration when determining the connected load.

The connected load consists of:

- The sum of all volumes metered by system distributors
- + 25% of this value (safety margin)
- + 1 cm<sup>3</sup>/m of main line (expansion loss)
- Compressibility loss with fluid greases

↑ Table 2

SKF specialists can provide you with additional information.

## Commissioning

To commission the product, fill the reservoir with lubricant and actuate the pump at intervals of 5 – 10 seconds until lubricant discharges at all lubrication points.

The venting process is facilitated by:

- Opening the ends of the main lines until bubble-free oil or fluid grease discharges from the ends.
- Filling long lubrication point lines, especially for distributor ports with low metering volumes, before connecting to the lubrication points.

## Maintenance

- Check the fill level and fill the reservoir in time. Use the lubricant in accordance with the information provided by the manufacturer. Always use a screen filter when refilling oil.
- After using the machine for an extended period of time, inspect all pipe connections for leakage and actuate the piston pump to check whether lubricant discharges at all lubrication points.

Only use original SKF spare parts.

Table 1

### Permissible length of main line<sup>a)</sup>

due to required pressure reduction during relief phase

Lubricant distributor	Lower temperature limit [°C]	Pipe dimensions (mm)		
		6x0.7 Length [m]	8x0.7 Length [m]	10x0.7 Length [m]
<b>340</b>	10	6	9	13
<b>350</b>		6	9	13
<b>390</b>		2	17	22

\*) On longer systems or operating temperatures <10°C

a) Select larger pipe diameters

b) Position pump unit in center of system

c) Installation an additional relief device

Table 2

### Compressibility loss

	Pipe dimensions (mm)		
	6x0.7	8x0.7	10x0.7
Compressibility loss [cm <sup>3</sup> /m]	0.17	0.34	0.58

Compressibility loss with fluid greases

Displacement loss occurs due to the 1% compressibility of grease and must be considered when determining the connected load.

# Pump overview

Order No.	Lubricant		Delivery rate	Reservoir capacity	Drive			Fill level switch	Page
	Oil	Fluid grease	[cm <sup>3</sup> /stroke]	[liter]	manual	pneumatic	hydraulic		
POE-15-0.5	•		15	0.5	•				6
POE-15-1.0	•		15	1.0	•				6
POE-15-1.0W	•		15	1.0	•			•	6
POE-15-1.7	•		15	1.7	•				6
POE-15-1.7W	•		15	1.7	•			•	6
POEP-15-0.5	•		15	0.5		•			6
POEP-15-1.0	•		15	1.0		•			6
POEP-15-1.0W	•		15	1.0		•		•	6
POEP-15-1.7	•		15	1.7		•			6
POEP-15-1.7W	•		15	1.7		•		•	6
P-289	•		10	1.5		•			10
PW-289	•		10	1.5		•		•	10
PFE-15-0.5		•	15	0.5	•				8
PFE-15-1.0		•	15	1.0	•				8
PFE-15-1.0W2		•	15	1.0	•			•	8
PFE-15-1.7		•	15	1.7	•				8
PFE-15-1.7W2		•	15	1.7	•			•	8
PFEP-15-0.5		•	15	0.5		•			8
PFEP-15-1.0		•	15	1.0		•			8
PFEP-15-1.0W2		•	15	1.0		•		•	8
PFEP-15-1.7		•	15	1.7		•			8
PFEP-15-1.7W2		•	15	1.7		•		•	8
PF-289		•	10	1.5		•			10
PFW-289		•	10	1.5		•		•	10
PPS	•	•	30	1.5		•		•	12
P-846-2	•		7	-		•			15
P-886	•		30	-		•	•		16

Piston pumps for commercial vehicles †Single-line Centralized Lubrication Systems for Commercial Vehicles, brochure 1-9420-EN

# Pump overview



## POE/PFE piston pumps

Lubricant **Oil** Page 4-5  
**Fluid grease** Page 6-7


Actuation manual  
 Fill level monitoring optional  
 Reservoir capacity 0.5; 1.0 or 1.7 liters  
 Delivery rate 15 cm<sup>3</sup>/stroke



## POEP/PFEP piston pumps

Lubricant **Oil** Page 4-5  
**Fluid grease** Page 6-7

Actuation pneumatic  
 Fill level monitoring optional  
 Reservoir capacity 0.5; 1.0 or 1.7 liters  
 Delivery rate 15 cm<sup>3</sup>/stroke

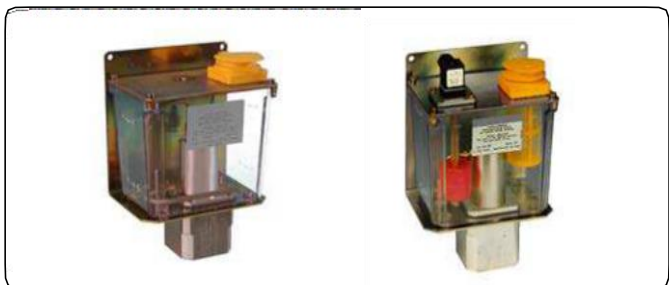

## P/PF/PW/PFW piston pumps

Lubricant **Oil** Page 8  
**Fluid grease** Page 8

Actuation pneumatic  
 Fill level monitoring optional  
 Reservoir capacity 1.5 liters  
 Delivery rate 10 cm<sup>3</sup>/stroke



## PPS piston pumps

Lubricant **Oil and fluid grease** Page 12-14

Actuation pneumatic  
 Fill level monitoring optional  
 Integrated pressure switch optional  
 Reservoir capacity 1.5 l  
 Delivery rate 30 cm<sup>3</sup>/stroke



## P-846-2 / P-886 piston pumps without reservoir

Lubricant **Oil** Page 15 / 16

### P-846-2

Actuation pneumatic  
 Delivery rate 7 cm<sup>3</sup>/stroke

### P-886

Actuation pneumatic or hydraulic  
 Delivery rate 30 cm<sup>3</sup>/stroke

# POE(P) piston pumps for oil, manually or pneumatically actuated

Manually actuated



Pneumatically actuated



## Order No. Overview

Order No.	Reservoir capacity [liter]	Drive		Fill level switch
		manual	pneumatic	
<b>POE-15-0.5</b>	0.5	•		
<b>POE-15-1.0</b>	1.0	•		
<b>POE-15-1.0W</b>	1.0	•		•
<b>POE-15-1.7</b>	1.7	•		
<b>POE-15-1.7W</b>	1.7	•		•
<b>POEP-15-0.5</b>	0.5		•	
<b>POEP-15-1.0</b>	1.0		•	
<b>POEP-15-1.0W</b>	1.0		•	•
<b>POEP-15-1.7</b>	1.7		•	
<b>POEP-15-1.7W</b>	1.7		•	•

## Technical data

### Pump

Drive .....	manual or pneumatic
Reservoir capacity .....	0.5; 1.0 and 1.7 liters
Reservoir material .....	Plastic (PP), transparent
Outlets .....	G <sup>1</sup> / <sub>4</sub> , on left or right
Compressed air connection .....	G <sup>1</sup> / <sub>4</sub> (on pump bottom)
Operating pressure, max. ....	30 bar (manual. actuated)
	60 bar (pneum. actuated)
Delivery rate per stroke .....	15 cm <sup>3</sup>
Transmission ratio for pneum. pumps .....	10:1

Ambient temperature ..... 0 to +60 °C


Lubricant ..... Mineral, synthetic, and environmentally compatible oils, operating viscosity 20 to 1500 mm<sup>2</sup>/s

### Fill level switch for monitoring the min. oil level

Function .....	Contact opens at minimum fill level
Switching voltage, max. ....	42 V DC
Switching capacity, max. ....	50 W
Plug .....	4-pin M12×1 circular plug
Mounting position .....	1, 2 or 3 possible (2 on delivery)

Diagram 1

## Pressure diagram for pneumatic drive

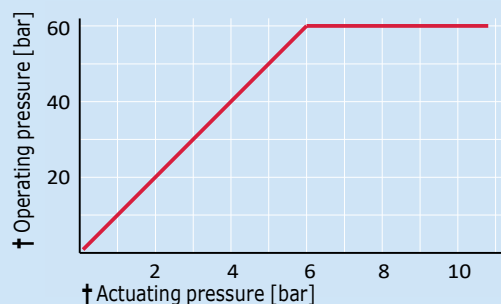

### Note

For a hydraulic system pressure of >45 bar, use cutting-sleeve screw unions conforming to DIN 2353 or plug connectors as connection fittings.

For fittings and accessories † **brochure 1-0103-EN**;  
for connector systems † **brochure 1-0103-1-EN**.

Fig. 1

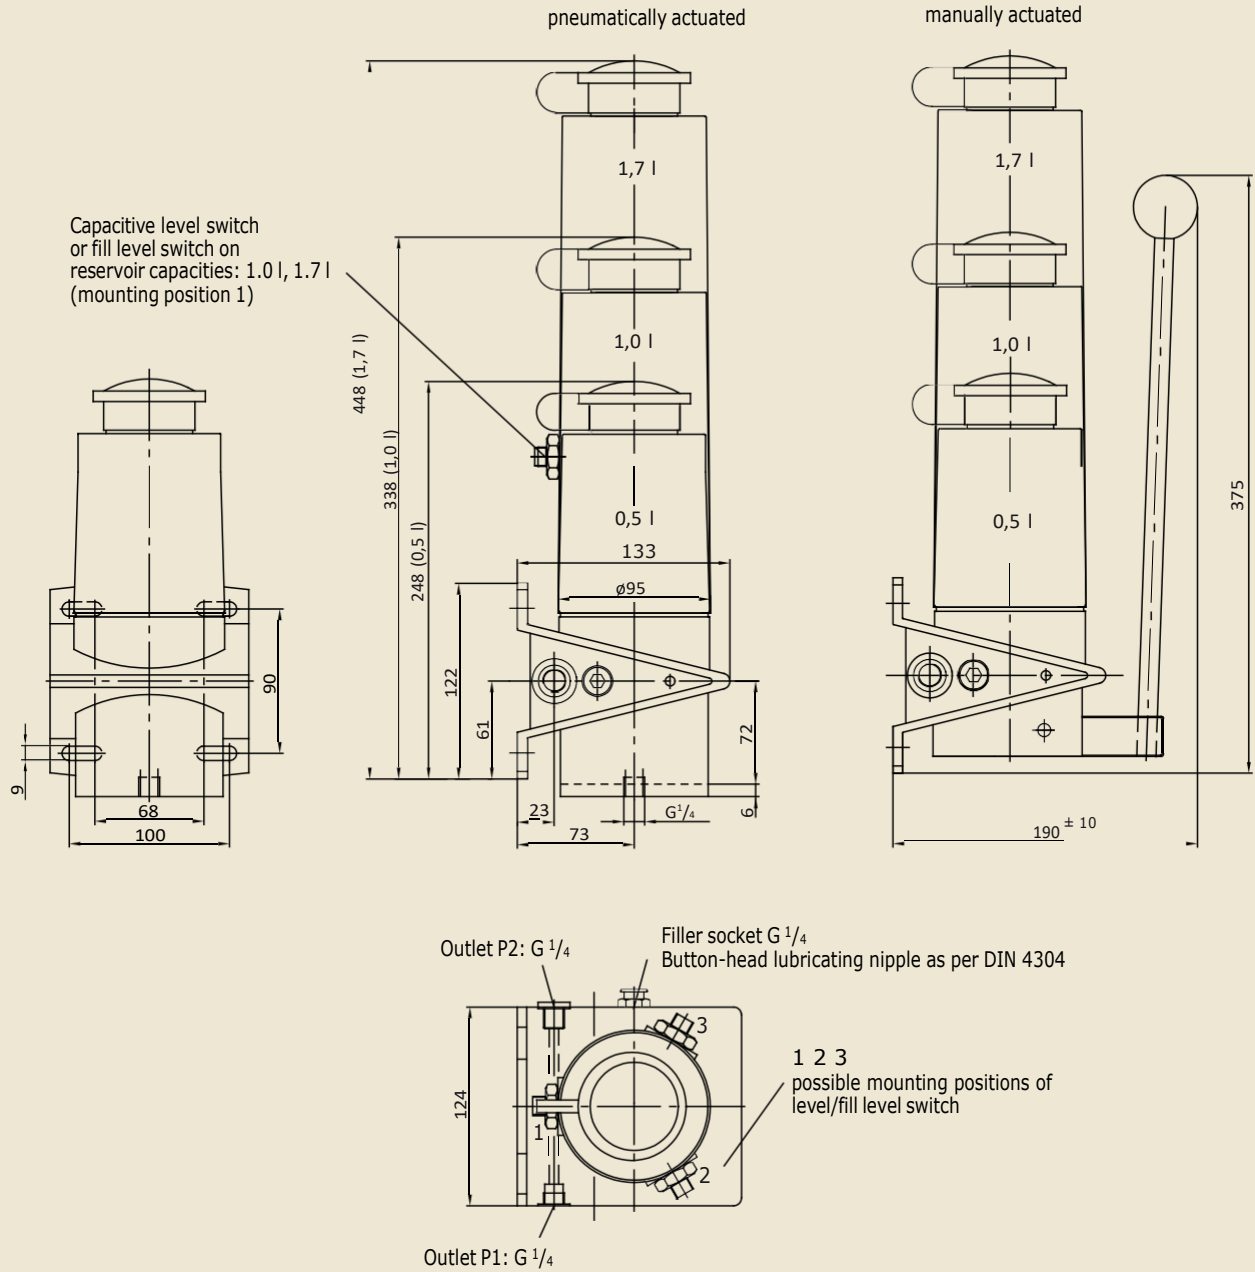


Fig. 2

Hydraulic layout for POE (manual)




Fig. 3

Hydraulic layout for POEP (pneumatic)





Fig. 4

Wiring diagram for fill level monitoring

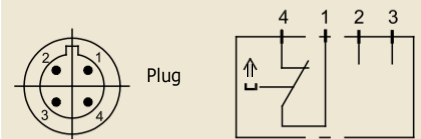

# PFE/PFEP piston pumps for fluid grease, manually or pneumatically actuated

Manually actuated



Pneumatically actuated



## Order No. Overview

Order No.	Reservoir capacity [liter]	Drive		Fill level switch
		manual	pneumatic	
<b>PFE-15-0.5</b>	0.5	•		
<b>PFE-15-1.0</b>	1.0	•		
<b>PFE-15-1.0W2<sup>1)</sup></b>	1.0	•		•
<b>PFE-15-1.7</b>	1.7	•		
<b>PFE-15-1.7W2<sup>1)</sup></b>	1.7	•		•
<b>PFEP-15-0.5</b>	0.5		•	
<b>PFEP-15-1.0</b>	1.0		•	
<b>PFEP-15-1.0W2<sup>1)</sup></b>	1.0		•	•
<b>PFEP-15-1.7</b>	1.7		•	
<b>PFEP-15-1.7W2<sup>1)</sup></b>	1.7		•	•

<sup>1)</sup> Level switch connection, 4-pin M8x1 circular plug, plug with 5 m cable, order No. 179-990-762

## Technical data

### Pump

Drive.....	Manual or pneumatic
Reservoir capacity.....	0.5; 1.0 and 1.7 liters
Reservoir material.....	Plastic (PP), transparent
Outlets.....	G <sup>1</sup> / <sub>4</sub> , on left or right
Compressed air connection.....	G <sup>1</sup> / <sub>4</sub> (on pump bottom)
Operating pressure, max.....	30 bar (manual. actuated) 60 bar (pneum. actuated)
Delivery rate per stroke.....	15 cm <sup>3</sup>

Transmission ratio for pneum. pumps 10:1

Ambient temperature ..... 0 to +60 °C


Lubricant..... Fluid grease,  
NLGI Grade 000, 00

### Fill level switch for monitoring the min. grease level

Function.....	NPN, PNP/NO-contact - NC contact
Switching voltage, max.....	10 to 36 V DC
Operating current at switching output.....	max. 150 mA
Protection class.....	P 67
Connection.....	2 m PVC cable or 4-pin M8x1 circular plug
Mounting position.....	1, 2 or 3 possible (2 on delivery)

Diagram 2

## Pressure diagram for pneumatic drive

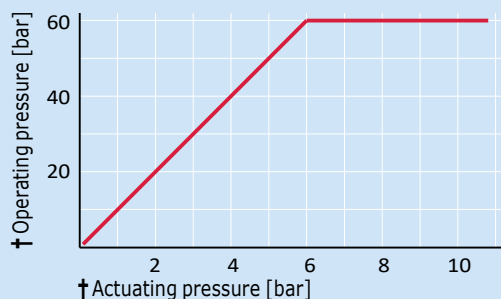

### Note

For a hydraulic system pressure of >45 bar, use cutting-sleeve screw unions conforming to DIN 2353 or plug connectors as connection fittings.  
For fittings and accessories † **brochure 1-0103-EN..**



Fig. 5

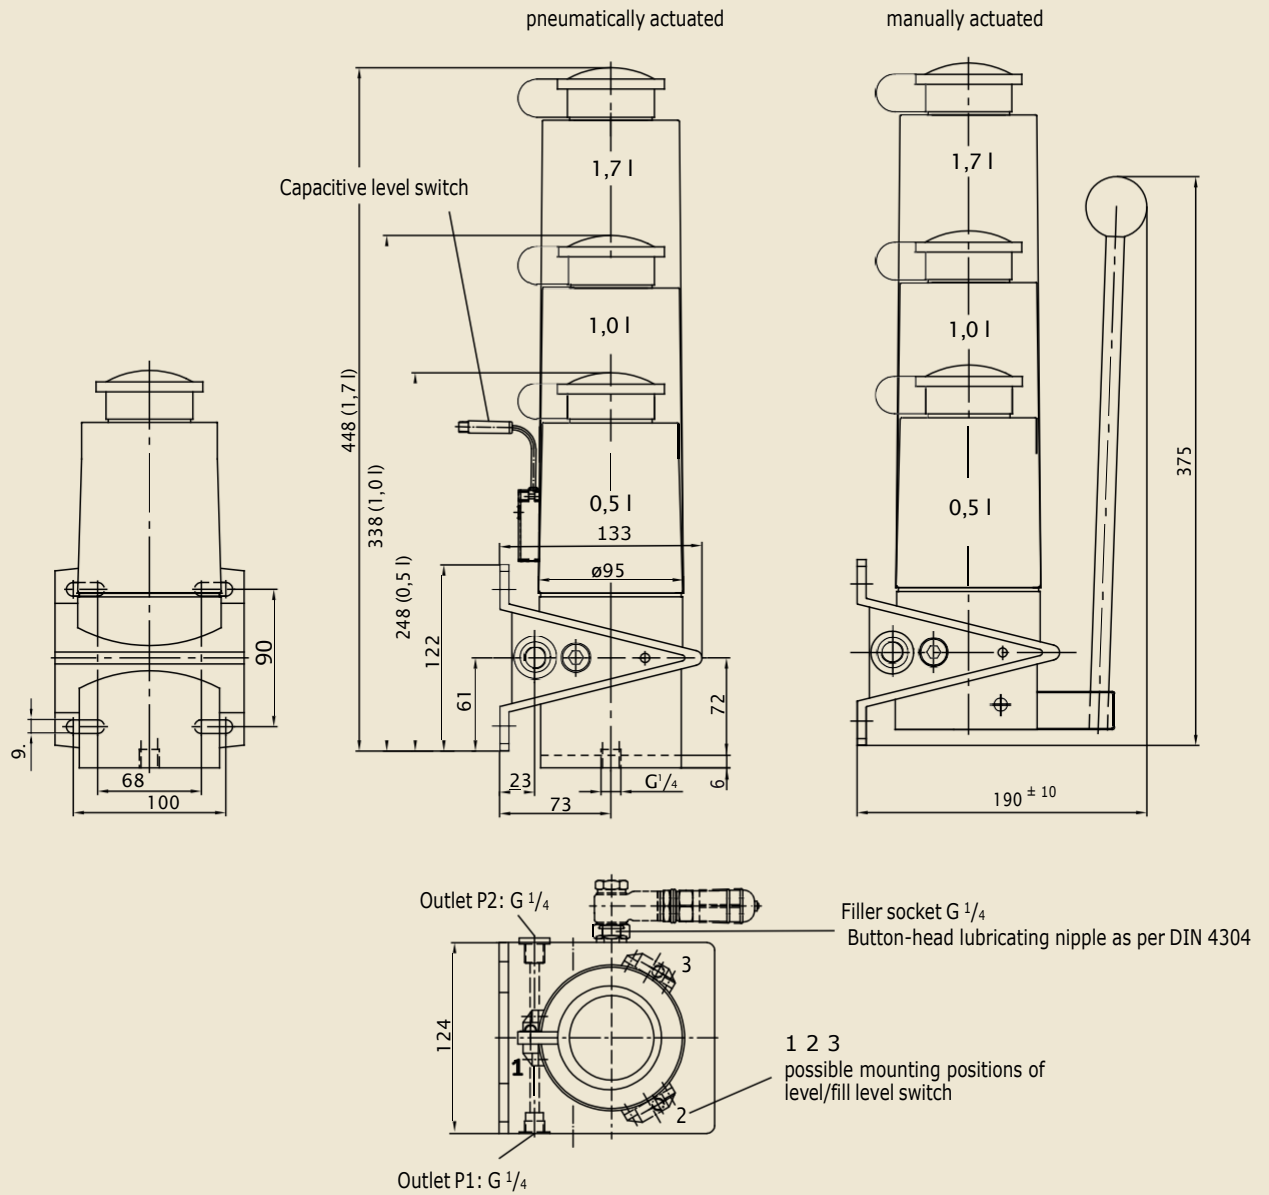


Fig. 6

Hydraulic layout for PFE (manual)




Fig. 7

Hydraulic layout for PFEP (pneumatic)





Fig. 8

Wiring diagram for fill level monitoring



# P(F)(W)-289 piston pump for oil or fluid grease, pneumatically actuated

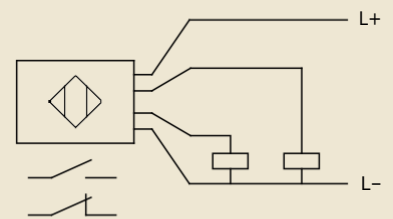

Order No. Overview				
Order No.	Lubricant		Fill level switch	Fig.
	Oil	Fluid grease		
P-289	•			9
PW-289	•		•	11
PF-289		•		9
PFW-289		•	•	11

A pressure regulating valve, e.g. WVN200-6B40, with a cracking pressure of 40 bar must be used to protect the system.

Technical data	
<b>Pump</b>	
Drive.....	pneumatic
Reservoir capacity.....	1.5 liters
Operating pressure, max.....	3.5 to 10 bar
Delivery rate per stroke.....	10 cm <sup>3</sup>
Ambient temperature.....	+10 to 40 °C
Type of enclosure.....	P 54
Lubricant.....	Mineral, synthetic, and environmentally compatible oils, operating viscosity 20 to 1000 mm <sup>2</sup> /s or fluid grease, NLGI grades 000, 00
<b>Fill level switch for monitoring the min. grease level</b>	
Function .....	1 changeover
Switching voltage, max. ....	230 V AC      230 V DC
Switching current max. ....	1.0 A      1.0 A
Breaking capacity max. ....	60 VA      40 W
Cable gland.....	PG11

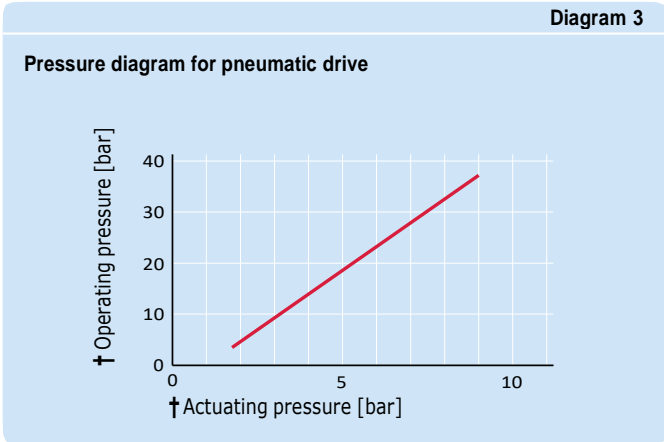
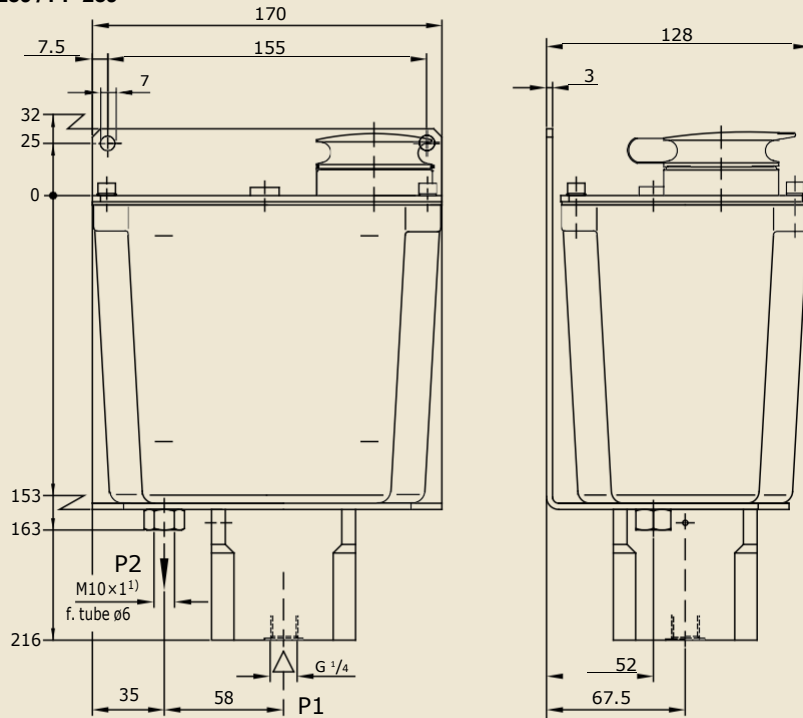


Fig. 9

**P-289 / PF-289**

P1 = Compressed air connection

P2 = Compressed air connection to system

1) Ports tapped for solderless tube connection for ø6 tubing

Fig. 10


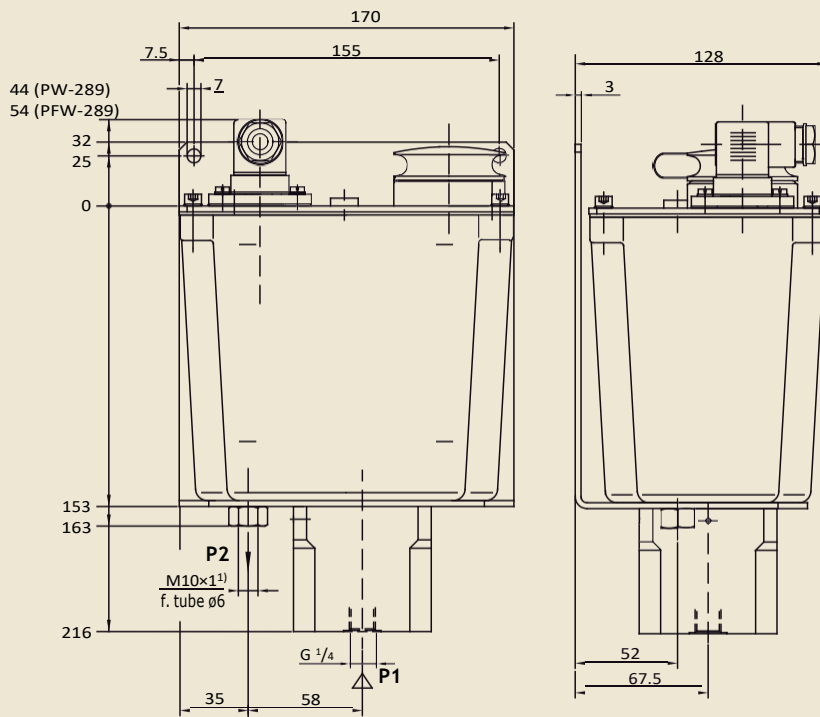
**Hydraulic layout for PF-289**

Fig. 11


**PW-289 / PFW-289**

P1 = Compressed air connection

P2 = Compressed air connection to system

1) Ports tapped for solderless tube connection for ø6 tubing

Fig. 12

**Hydraulic layout for PW-289**

# Piston pump unit PPS for oil and fluid grease, pneumatically driven



## Technical data

### Pump

Drive.....	Pneumatic
Reservoir capacity.....	1.5 liter
Reservoir material.....	Plastic (SAN)
Number of outlets.....	Max. 3
Operating pressure, max.....	Up to 27 bar (depending on actuating pressure)
Actuating pressure.....	4.5-6 bar
Delivery rate per stroke.....	30 cm <sup>3</sup>
Number of cycles.....	Max. 6 cycles/h
Ambient temperature.....	+10 to +50 °C
Lubricant.....	Mineral and synthetic oils, operating viscosity 20 to 1500 mm <sup>2</sup> /s or fluid grease, NLGI Grade 000, 00

### Fill level switch, min.

Lubricant.....	Oil or fluid grease
Function.....	Capacitive, NC contact
Switching voltage, max.....	10 to 36 V DC
Switching capacity, max.....	0.6 W

### Pressure switch

Function.....	NO-contact
Nominal pressure.....	16 bar
Electrical signal output.....	M12x1 circular plug, 4-pin acc. to DIN EN 60947-5-2
Switching voltage, max.....	V
Switched current.....	0.5 A

back view




Optionally with oil filler screen



Diagram 4

## Pressure diagram for pneumatic drive

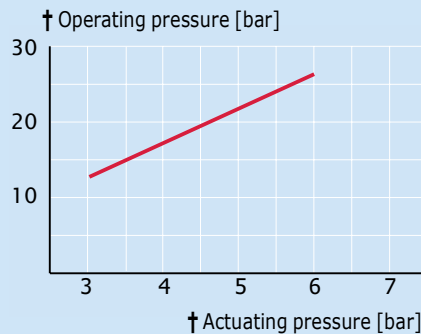

## Accessories (optional)

### Oil filler screen

Order No. **169-400-405**


The oil filler screen option can be used only on PPS30 pumps produced after September 29, 2017.

# Piston pump unit PPS for oil and fluid grease, pneumatically driven

Fig. 13

PPS30...

Pipe thread \*)  
M10x1, 7 deep

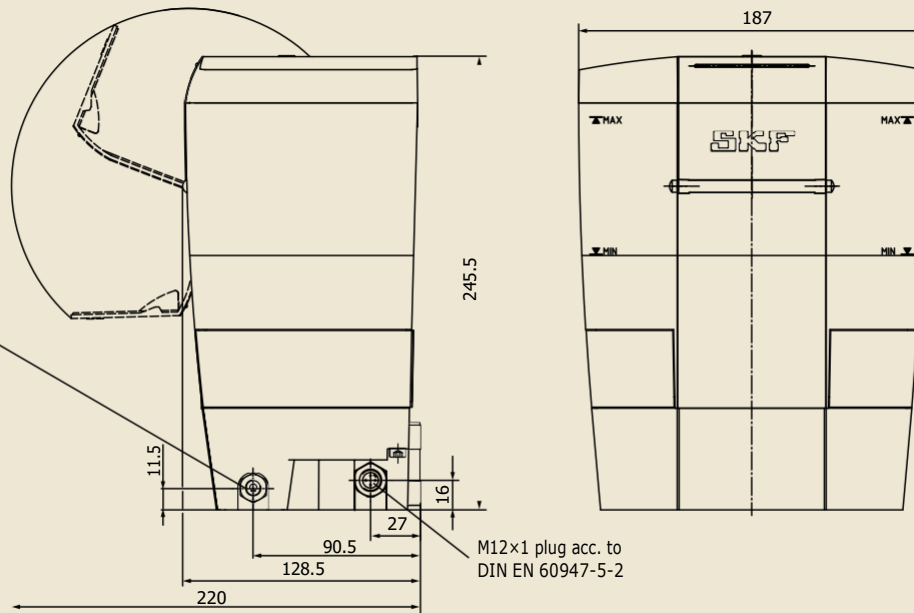

\*) Pipe thread with counterbore for solderless pipe unions per DIN 2353

The hydraulic outputs of the PPS30 (left, rear, right) are designed so that no torque can be transmitted to the pump housing. This prevents possible damage to the pump during mounting of the connecting elements. However, when installing the connecting elements (e.g., plug connector) ensure that the hydraulic outputs (external hex) are held with a WAF 17 tool while screwing in the connecting elements.

Fig. 14

PPS hydraulic layout




Fig. 15

Connection of pressure switch/fill level switch


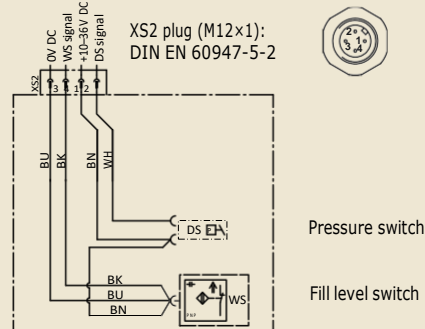


Fig. 16

Wall bracket for mounting from front

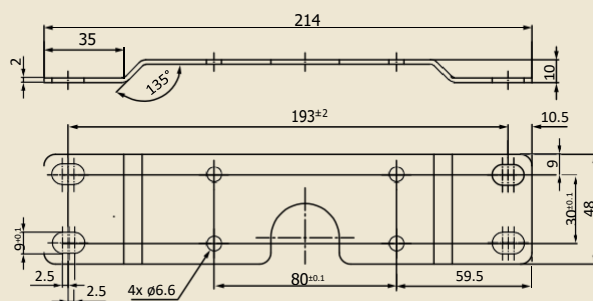


Accessories (optional)

Wall bracket incl. mounting equipment  
(mounting kit) → Fig. 16  
Order No. 995-901-061

# PPS piston pump for oil and fluid grease

## Order code

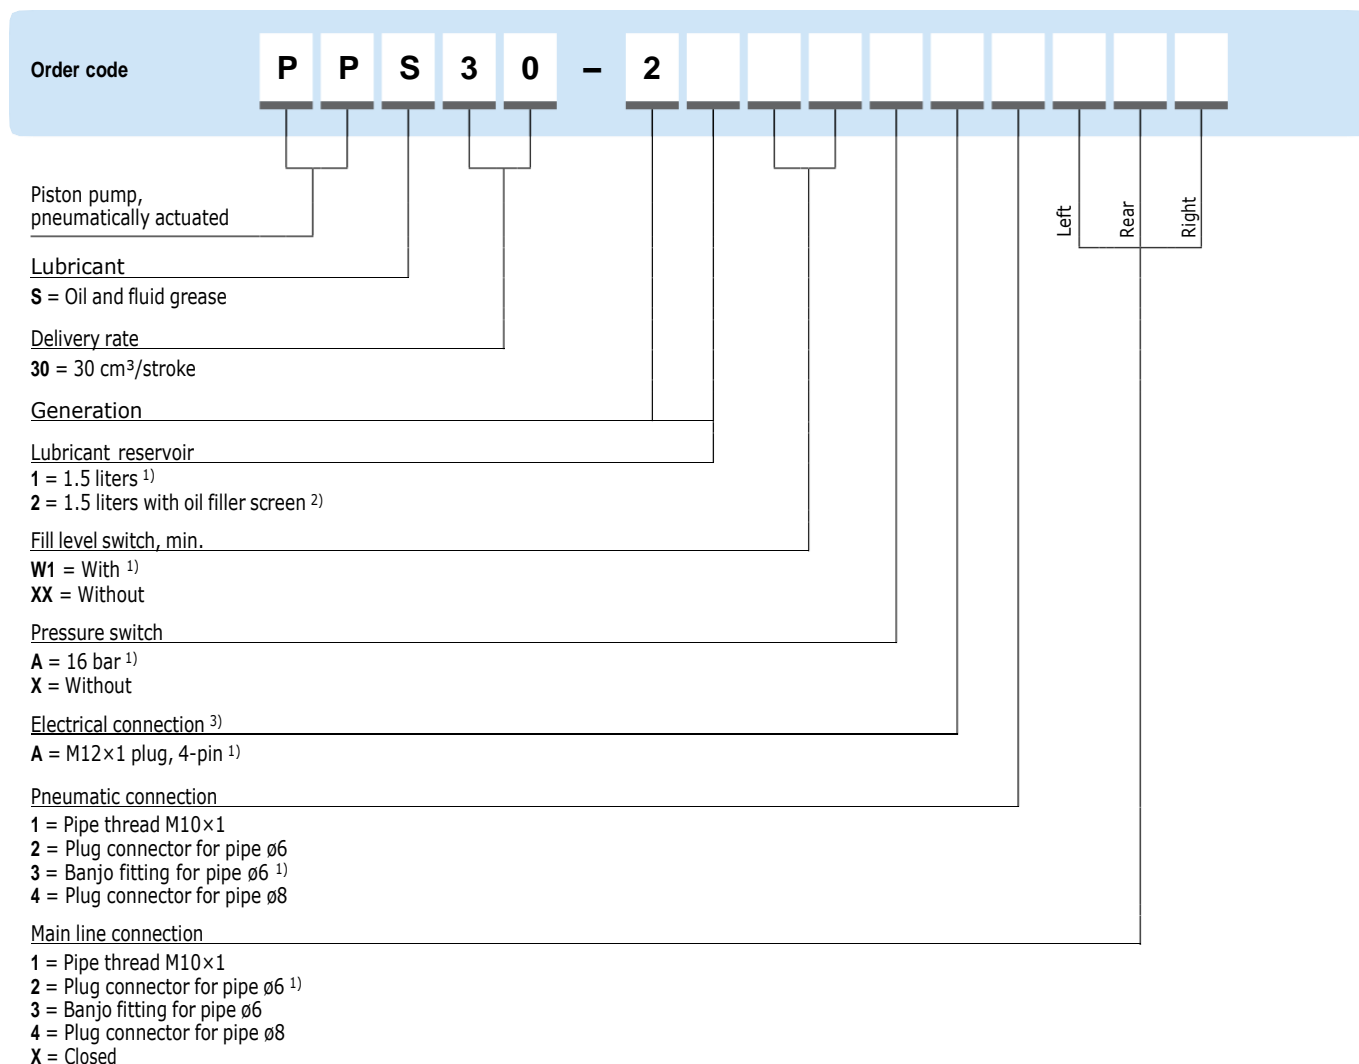

<sup>1)</sup> Standard design

<sup>2)</sup> The oil filler screen option can be used only on PPS30 pumps produced after September 29, 2017.

<sup>3)</sup> "x" is assigned automatically if fill level switch and pressure switch are absent.


### Fittings for pneumatic and main line connection

For code	Order No.
1	-
2	406-004-VS
3	506-140-VS
4	408-004-VS
X	466-431-001

### Order example

#### PPS30-21W1AA1132XX

- Piston pump unit, pneumatically actuated
- For oil and fluid grease
- Delivery rate 30 cm<sup>3</sup>/stroke
- 2. Generation
- 1.5-liter plastic reservoir
- Warning switch for min. fill level
- Pressure switch 16 bar
- Electrical connection M12×1, 4-pin
- Pneumatic connection M10×1
- Main line connection Left: M10×1  
Rear: Banjo fitting ø6  
Right: Plug connector ø6

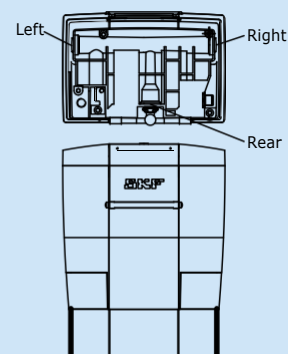

# P-846-2 piston pump for oil, pneumatically operated



## Technical data

### Pump

Order-No.....	P-846-2
Drive.....	pneumatic
Operating pressure.....	2.5–8 bar
Delivery rate per stroke.....	7 cm <sup>3</sup>
Type of enclosure.....	P 54
Operating temperature.....	+10 to +60 °C
Lubricant.....	Mineral or synthetic oils, compliant with plastic, NBR-elastomers, copper and copper alloys

## Example with 7 liter metal reservoir



Diagram 5

## Pressure diagram for pneumatic drive


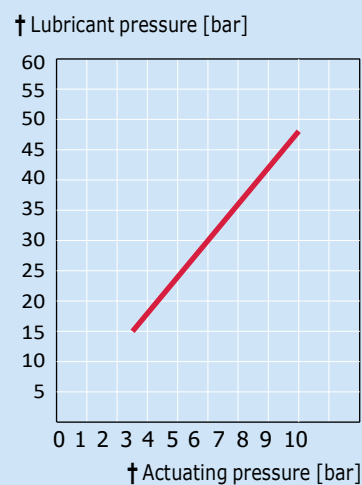


Fig. 17

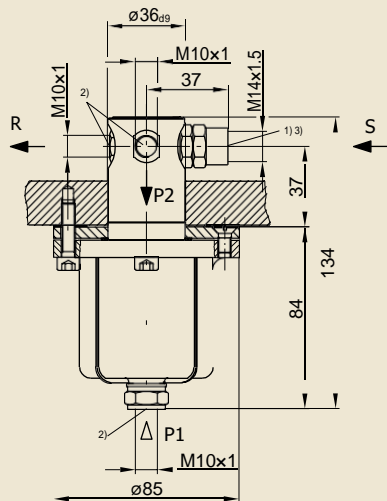


P1 = Compressed air connection  
P2 = Lubricant pressure  
S = Inlet (inlet valve)  
R = Pressure relief valve (return)

- <sup>1)</sup> The inlet valve (S) at the pump is attached separately.
- <sup>2)</sup> Ports tapped for solderless tube connection for tube  $\varnothing 6$ .
- <sup>3)</sup> Ports tapped for solderless tube connection for tube  $\varnothing 8$ .

Fig. 18

## P-846-2 hydraulic layout



# P-886 piston pump for oil, pneumatically or hydraulically operated




## Technical data

### Pump

Order No.....	P-886
Drive.....	pneumatic or hydraulic <sup>1)</sup>
Operating pressure.....	4–10 bar
Delivery rate per stroke.....	30 cm <sup>3</sup>
Type of enclosure.....	P 54
Operating temperature.....	+10 to +40 °C
Lubricant.....	Mineral or synthetic oils, compliant with plastic, NBR-elastomers, copper and copper alloys

<sup>1)</sup> Residual pressure must be reduced to 0 bar at hydraulic operation.

Fig. 19

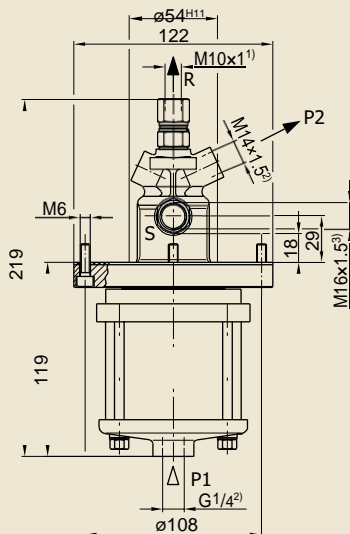

P1 = Connection for operating medium (e. g. compressed air)  
P2 = Pressure port, lubricating side  
S = Inlet (inlet valve)  
R = Pressure relief valve (return)


<sup>1)</sup> Ports tapped for solderless tube connection for tube ø6.

<sup>2)</sup> Ports tapped for solderless tube connection for tube ø8.

<sup>3)</sup> Ports tapped for solderless tube connection for tube ø10.

Diagram 6

## Pressure diagram for pneumatic drive

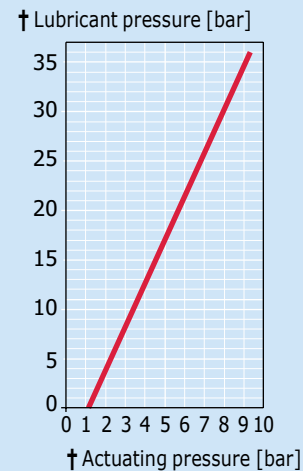



# Accessories for piston pumps

Fig. 20

Pressure reducing valve (kit)


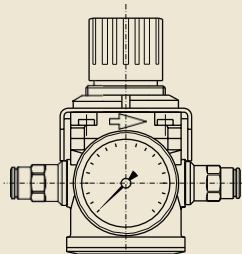


Fig. 21

3/2 directional control valve (kit)

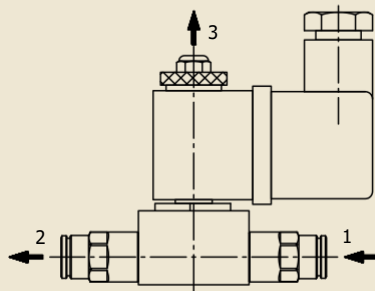

## Accessories (optional)

Pressure reducing valve (kit) → Fig. 20

Order No. 995-901-062

3/2 directional control valve (kit) → Fig. 21

Order No. 995-901-063

Voltage 24 V DC







#### Further brochures


1-0103-EN	<i>Fittings and Accessories</i>
1-1701-EN	<i>Pressure switches DSA, DSB, DSC, DSD</i>
1-1702-EN	<i>Fill level switch WSx</i>
1-1730-EN	<i>Electrical plug and socket connectors</i>
1-5001-EN	<i>Lubricant distributors</i>
1-9201-EN	<i>Transport of Lubricants in Centralized Lubrication Systems</i>

#### SKF Lubrication Systems Germany GmbH

Motzener Strasse 35/37  
12277 Berlin · Germany  
PO Box 970444 · 12704 Berlin · Germany

Tel. +49 (0)30 72002-0  
Fax +49 (0)30 72002-111

This brochure was presented by:

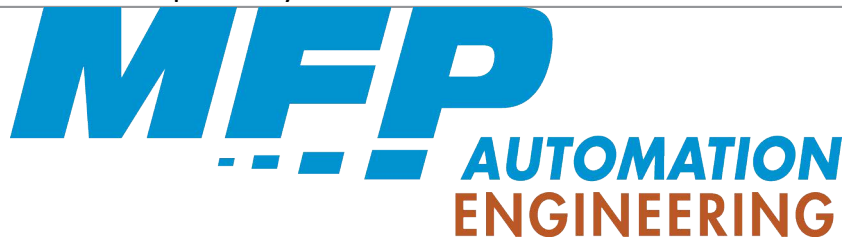

® SKF is a registered trademark of the SKF Group.

© SKF Group 2018

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB LS/P2 11218 EN · January 2018 · 1-1110-EN

This publication supersedes publication 1-0015-EN · 1-1111-EN

